

ROYAL 9900

Applications

For chamfering, gouging and making grooves in all industrial metals. For removing defective welds and rivets with out using oxyacetylene and compressed air. Removing flashers and risers in foundry casing. For beveling cracks in machine frames without dismantling. A prerequisite for welding ,cutting of metal parts on building site.


Characteristics on Usage

Special electrode with high blowing effect And producing hot exothermic penetrating arc. The molten metal is blown away quickly and provides good visibility. The cut is smooth and molten and blown away material can be removed easily. Does not damage the metal structure.

Notes On Usage

- The electrode is inclined to the surface at 35°Angel .
- The arc is pushed deeper and forward to drive the molten metal and slag on words.
- For deeper groove repeat procedure in stages until the required depth is reached.

Welding Positions

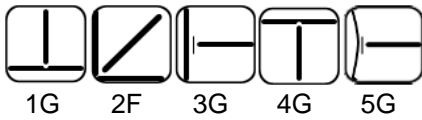

Packing and Welding Current

SIZE (mm)	KG PER PACKET	KG PER CARTON	In Amps
3.15 X 350	2	10	250 – 350
4.00 X 350	2	10	300 -400
5.00 X 350	2	10	350 – 500